


# ADI SPECIFICATION SHEET

## Pulse Card

**Part No. 8586-700** (24 VDC Positive Input)

**Part No. 8586-701** (24 VDC Negative Input)

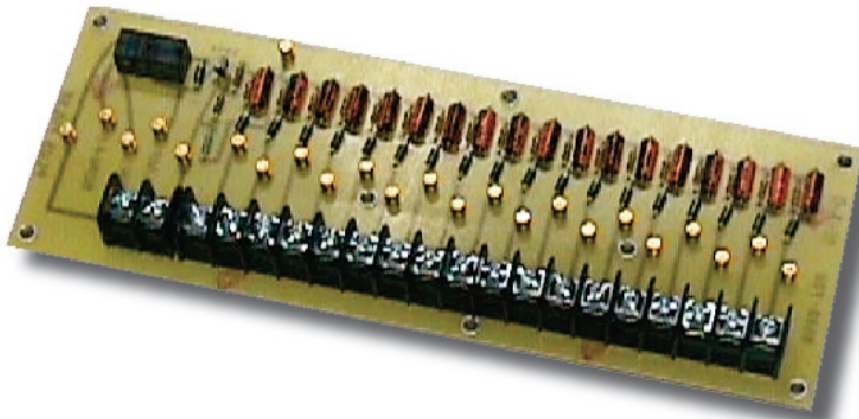

Status	Alarm Indicator	Audible Alarm
Normal	Off	Off
Alarm	On	On
Silence	On	Off

### Description

The ADI Pulse Card can drive up to 18 output points and activate a common audible alarm. The annunciation circuit is activated by 24 VDC input. Silencing the audible alarm is accomplished through a normally closed pushbutton. All activated indicators are reset when the alarm input is cleared at the source.

Each ADI Pulse Card has capacity for 18 circuits. If more output capability is required, multiple pulse cards may be used and wired with one common audible alarm and silence pushbutton.

**Automation Displays, Inc.**

3533 N. White Avenue, Eau Claire, WI 54703

Telephone:(715) 834-9595 Fax:(715) 834-9596 www.adipanel.com email:adi@adipanel.com